



Instrumentos y Equipos C.A

INTECH Instrumentos y Equipos C.A.

Av. Río Caura, Torre Humboldt, Ofic 04-04,
 Caracas, Venezuela 1080
 Tel: 58-212-9784430, 9784433, 977.7654, 977.6346
 Fax: 58-212-977.3613
 E-mail: sales@intech-ie.com
 RIF J-30615033-1

Quote # **C-2024-0304Rev1**
 Date: 11/11/2024
 Customer ID **CHEVRON**
PETROINDEPENDENCIA

Bill to:
CHEVRON GLOBAL TECHNOLOGY SERVICES COMPANY Av. Ppal La Estancia, Centro Banaven, Torre D, Piso 7, Chuao, Caracas 1060, Venezuela Att: Jorgelis Rincon - Depto de Procura Jorgelis.Rincon1@chevron.com

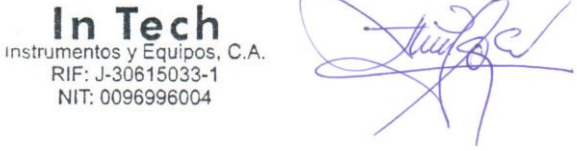
Ship to:
CHEVRON PETROINDEPENDENCIA Warehouse Edo Anzoategui, Venezuela

Sales Rep.	Your #	Our #	Destiny	Terms	Validity
N. Carricatti	VEN-RFQ-PI048	C-2024-0304/PL	Venezuela	DDP Jose complex	30 days

Item	Cant	Description	Unit Price US\$	Total US\$
1	3	<p>OPEN PATH GAS DETECTOR QUASAR 902, 15-40 m, ATEX, 3/4" NPT, ATEX/IECEx, SIL2, 4-20mA, HART WITH EXTENDED COMMISSIONING KIT FOR ALIGNMENT & CALIBRATION, TELEDYNE PN OPGD-902-C-212 / OPGD-888257</p> <p><u>NOTE: ALSO MODEL AVAILABLE WITH DISTANCE RANGE 35-100 m (903-C-312)</u></p> <ul style="list-style-type: none"> • Three color LED gives a quick visual of unit status • Intrinsically Safe communication port can be used with HART® Hand-Held in non-safe areas for setup and diagnostics • Heated optics provide unfettered Detection in most environments • Long range, up to 200 meters (depending on model), reduces number of units required • Fast response (< 3 seconds) gives quick alert to hazards • Low maintenance requirements saves time and money • Multiple regulatory approvals • Connects easily to existing systems • User programmable functions allow customization • Event recorder keeps track of all alerts and warnings • High reliability and a three-year warranty provide peace of mind <p>Product Specifications Detector /Source with Tilt Mount Dimensions (each) 10.5 x 11.4 x 5.1 inch (267 x 288 x 130 mm) Detector/Source with Tilt Mount Weight (each) 15.2 lbs (6.9 kg) Enclosure and Tilt Mount Material 316L Stainless Steel Operating Temperature Range / Humidity -67oF to 149oF -55oC to 65oC 0 – 95% RH (non condensing)</p>	\$30.430,00	\$91.290,00

		<p>Minimal Detectable Gas Level 0.15 LEL.m Communication 4-20 mA, MODBUS®, HART® Enclosure Ingress Protection NEMA 250 6P type, IP66/IP68 Electrical Connections 3 or 4 wire connections 10 – 32 VDC 6 Watts Max per unit Electromagnetic Compatibility EMI/RFI protected per EN50270 Approvals ATEX/IECEX: II 2(2)G D, Ex db eb [ib Gb] IIB+H2 T4 Gb, Ex tb IIIC T135oC Db, Ta = -55oC to +65oC FM/FMC: Class I Div. 1 Groupe B, C et D Class II/III Div. 1 Group E, F et G DNV: Type Approval Certification Certificate No. A-13607</p> <p>Extended Commissioning Kit - includes universal connection harness for Modbus® / HART® communication, check filters for calibration (Methane, Propane and Ethylene), Alignment Telescope, Magnetic Mode Selector</p> <p>Note: Mounting & maintenance tools are available optionally -Tilt or Pole mount & sunshade protectors - USB/RS485 Harness Converter Kit</p>		
2	2	<p>AUDIO + VISUAL ALARMS CLASS I, DIVISION 2 LOCATIONS AV1-C1D2E, HORN WITH XENON STROBE & RED LENS, 24 VDC OPERATION, TELEDYNE PN D2xC2X10AC115BN2A1G/R</p> <p>The hazardous location AVI-C1D2E combination light and sounder provides an economical solution for alarm annunciation in more industrial applications where there may be combustible gases present.</p> <p>Voltage Inputs: 24VDC Sounder Output: 116dBA @ 1 meter [107dBA @ 10ft/3m] Max Output Light Intensity: 10J Xenon 288.8cd Current Consumption: LED 412.5mA, 10J Xenon 609mA @ 24VDC Housing: Marine grade LM6 aluminium alloy • IP66 Type 4/4X/13/3R Operating/Storage Temperature: -40° to +50°C [-40° to +122°F]/-40° to +70°C [-40° to +158°F] Certifications: UL • cUL • IECEx • ATEX CI • II Div2 Zone2 • 22</p>	\$4.990,00	\$9.980,00
		<p>Delivery Time ARAD/AROC, Item 1, 2 : 6 – 10 weeks</p> <p>Payment Terms 100% Payment 30 days NET</p> <p>Packing Material will be Securely packed in wooden crates suitable for air freight and export. Volume & Weight (to be reconfirmed) To be advised – Aprox 95 Lbs</p> <p>General Warranty: Our brands warrants its products to be free from defects in material and/or workmanship for a period of 18 months after delivery or 12 months from installation, whichever</p>		

	<p>occurs first, provided that written claim be made during the period of the warranty. Manufacturer's obligation under this warranty is limited solely to repairing or replacing necessary parts and in no event shall manufacturer's be liable for damages in excess of the amount paid by the purchaser.</p> <p>Project Cancellation charges:</p> <p>15% Up to submittal of Engineering & Design Drawings and Documents (when applicable)</p> <p>25% After submittal of Engineering & Design Drawings and Documents (when applicable)</p> <p>50% After material order placement and before production commences</p> <p>75% Within two weeks of production release</p> <p>100% Two weeks after production commences</p>		
	<p>NOTAS:</p>		
	<p>CONDICIONES DE PAGO</p> <p><u>COMPONENTE IMPORTADO</u></p> <p><i>En DOLARES AMERICANOS (US\$) o en EUROS equivalentes mediante transferencia bancaria a la siguiente cuenta</i></p> <p>AMERANT BANK (in US\$) 220 ALHAMBRA CIRCLE, CORAL GABLES, FL. 33134 CUENTA NUMERO 8303790106 BENEFICIARIO INTECH INSTRUMENTOS Y EQUIPOS C.A. ABA 067010509 SWIFT MNB MUS33</p> <p><u>COMPONENTE NACIONAL (IVA)</u></p> <p><i>En BOLIVARES (Bs.) mediante transferencia bancaria</i></p> <p>Banco Mercantil Cuenta Corriente a nombre de INTECH Instrumentos y Equipos C.A. - 0105-0011-73-1011-50499-5</p>		
	<p>OTRAS CONDICIONES</p> <p>1. Todos los Equipos suministrados por INTECH Instrumentos y Equipos son Nuevos y cuentan con Certificados de Conformidad del Fabricante en caso de ser requeridos</p> <p>2. El valor del IVA podrá ser pagado y/o retenido en moneda local (Bs.) a la tasa referencial del día en caso de que el mismo no pueda ser pagado en US\$. El valor utilizado para el cálculo del mismo es tomado de acuerdo a lo informado por el Banco Central de Venezuela en su portal web www.bcv.org.ve y debera ser cancelado a la tasa oficial del día de pago o de la retención correspondiente</p> <p>3. Todos los materiales mantienen las condiciones de garantía Standard de los fabricantes.</p> <p>4. INTECH como representante y/o distribuidor exclusivo de múltiples marcas en el área de Instrumentación Industrial, calentamiento Eléctrico y Equipos de Laboratorio, solo suministrara garantía y servicio a los equipos y materiales adquiridos a través de los canales de venta autorizados de INTECH tanto localmente como internacionalmente</p> <p>5. Aporte SOCIAL: Esta Incluido en los precios y forma parte de la Oferta</p>		

	<p>6. Las empresas Mixtas no están sujetas a Impuesto a las Grandes Transacciones Financieras (IGTF), Por lo tanto, las facturas donde CHEVRON compra bienes o contrata servicios por cuenta de estas, no están sujetas a la percepción del IGTF. Todo ello con base en el Artículo 9, Numeral 3 de la Ley del IGTF (Gaceta Oficial Nro 6.687 Extraordinario de fecha 25/02/22.</p> <p>7. En caso de requerirse algún Tipo de Fianza de Anticipo, los Gastos de dicha Fianza serán reembolsables (en la moneda de su contratación) y por cuenta del Cliente CHEVRON, una vez recibidos los materiales en su almacén.</p>		
	 <p>In Tech instrumentos y Equipos, C.A. RIF: J-30615033-1 NIT: 0096996004</p>		

Please Transfer to Account of:
Bank: Amerant Bank
Address: 220 Alhambra Circle, Coral Gables,
Florida 33134, USA
ABA: 067010509
Swift: MNB MUS33

Beneficiary: INTECH INSTRUMENTOS Y EQUIPOS
C.A.
Account # 8303790106

Subtotal	US\$	101,270.00
Freight	US\$	Incluido
Insurance	US\$	--
IVA 16%	US\$	16,203.20
IGTF 3%	US\$	---
TOTAL	US\$	117,473.20